



PRODUCT SPECIFICATION

Quality		: CLOUD
Construction		: Scroll loop pile
Dye method		: Solution dyed
Gauge		: Tufted 1/10"
No. of tufts	ISO 1763	: $\pm 236400/\text{m}^2$
Pile fibre		: 100% Nylon (PA 6)
Pile weight	ISO 8543	: $650 \text{ gr/m}^2 \pm 5\%$
Pile height	ISO 1766	: $3.5 \text{ mm} \pm 5\%$
Primary backing		: Non-Woven
Tile backing		: Polyflex
Total thickness	ISO 1765	: $6,2 \text{ mm} \pm 5\%$
Total weight	ISO 8543	: $4200 \text{ gr/m}^2 \pm 7,5\%$
Tile size		: $50 \times 50 \text{ cm } (\pm 19.7'' \times 19.7'')$
Tiles per box		: 20



PERFORMANCE

Use classification	method en 1307	: 33
Castor chair test	EN 985 / EN ISO 4918	: intensive use
Abrasion	EN ISO 12951	: pass
Vettermann test	ISO 10361: 2015 / EN ISO 10833: 2019	: pass
Thermal resistance	EN 12664	: $R_{10} = 0,0726 \text{ m}^2 \text{ K/W}$
Thermal resistance	EN 12664	: $R_{23} = 0,0695 \text{ m}^2 \text{ K/W}$
Dimensional stability	EN 986	: pass
Luxury/Comfort	EN 1307	: LC1
Anti-slip property	EN 16165 method B	: R13
Impact sound insulation	EN ISO 10140	: $\Delta L_w = 23 \text{ Db}$
Sound Absorption	EN ISO 354	: $\alpha_w = 0.15 \text{ (H)}$



ELECTROSTATIC PROPERTIES


Walk on test	ISO 6356	: - 0,8 kV
Horizontal electrical resistance	ISO 10965	: $8,6 \times 10^{12} \Omega$
Vertical electrical resistance	ISO 10965	: $2,7 \times 10^{11} \Omega$
Static loading		: anti-static

FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: $B_{fl} - s1$

COLOUR FASTNESS PROPERTIES

Light	EN ISO 105 B02	: 8
Rubbing, dry	EN ISO 105 X12	: 5
Rubbing, wet	ISO 105 X12	: 5
Water, change in colour	EN ISO 105-E01	: 4

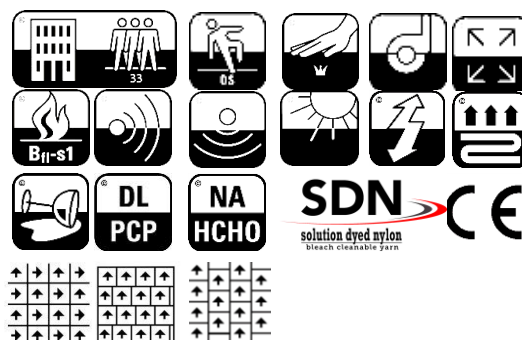

GENERAL

Recommended maintenance:
Pile direction:

Best results are obtained when cleaned with a dry shampoo method.
Directional arrows are printed on the back of each tile.
Best results are obtained when laid quarter turn or brick.

Laying instructions:

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m^2 it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

COLOURS

9677
9655
9675
9665
9676

9678
9685
9675
9625
9672

9673
9633
9675
9622
9671